




Freestanding bathtub in solid surface
 AVAS1041SS_

Benedini Associati, 2009

Exmar free-standing bathtub with round interior.



Finishes

-  White
-  White/dark grey
-  White/light grey

Materials

-  solid surface




Bathtub with round interior in white solid surface or two colourd (soft touch exterior in dark grey RAL7021 or light grey RAL7044). The version in solid surface is available with overflow. Use of the .MET0477L waste with siphon is obligatory. the taps can be mounted on the wall or floor.

Height:	60 cm	23" 5/8 inches
Diameter:	130 cm	51" 1/8 inches
Weight:	132 kg	291 lbs
Capacity:	520 l	137 gal
Packaging:	143 x 143 x 68 cm	56" 2/8 x 56" 2/8 x 26" 6/8 inches
Total weight:	231 kg	509 lbs

Note: For an easier installation of the bathtubs we recommend to use the template for the positioning of the waste trap AKITPZVAS.




Main dimensions

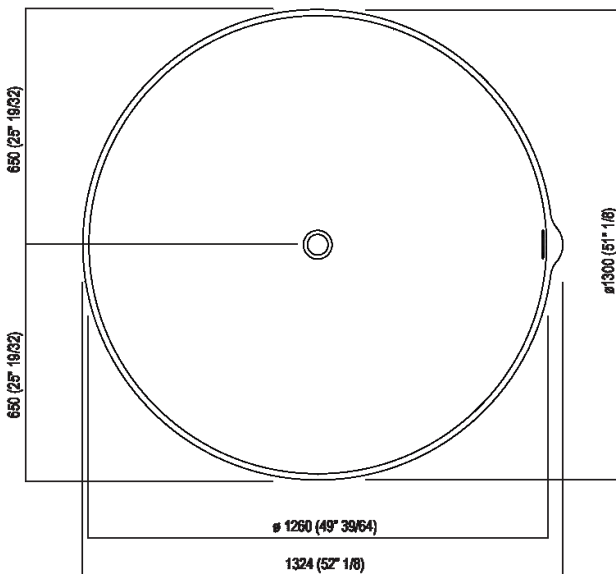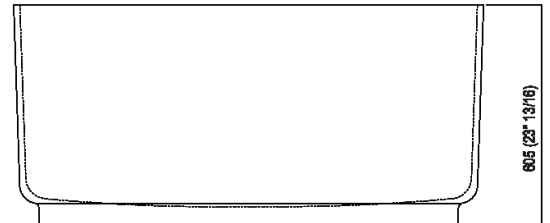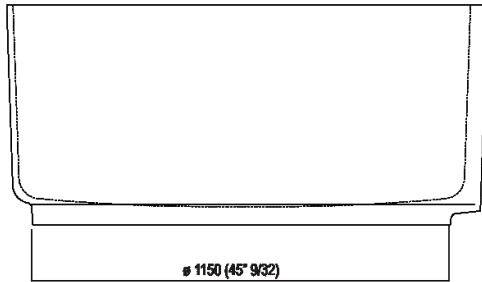




Dimensions for recess

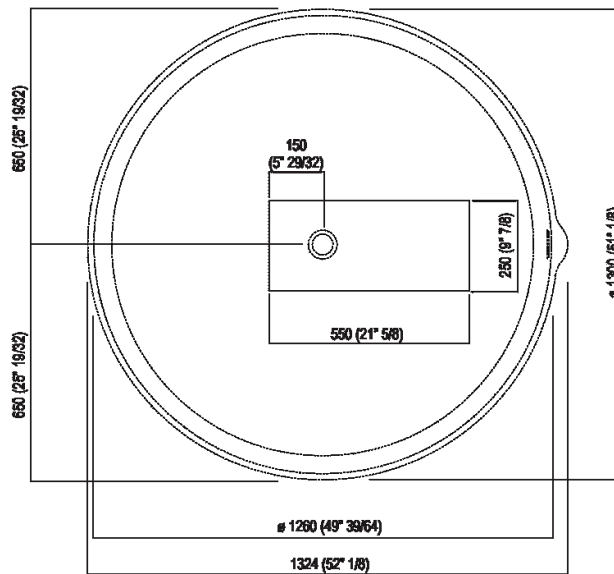



Dimensions for wall mounted taps

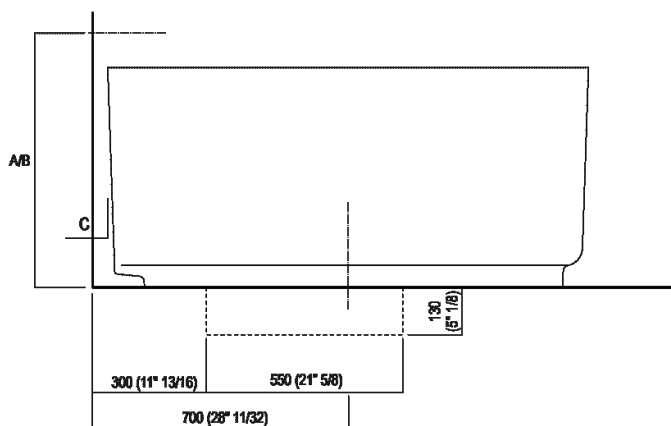


	A*	B**	C
FEZ 2 (EFEZ027)	750 (29 17/32)	-	80 (3 5/32)
LIMÓN (ELIM443)	750 (29 17/32)	-	80 (3 5/32)
MEMORY (EMEM324, EMEM343)	750 (29 17/32)	-	80 (3 5/32)
(EMEM342)	750 (29 17/32)	-	50 (1 31/32)
MEMORY MIX (EMIX437)	750 (29 17/32)	-	50 (1 31/32)
SQUARE (ERUB1117)	-	700 (27 9/16)	50 (1 31/32)
(ERUB1118)	-	700 (27 9/16)	80 (3 5/32)
SEN (ESEN0912V)	-	700 (27 9/16)	80 (3 5/32)

* inserasse gruppo / axial distance for tap
 ** filo inferiore gruppo / Tap's lower edge




Dimensions for freestanding spouts

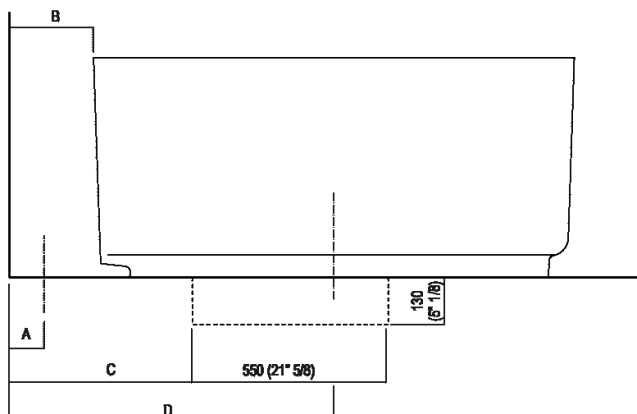

	A	B	C	D
FEZ 2 (EFEZ026, .MET885)	90 (3'35/64)	175 (6'57/64)	421 (16'37/64)	822 (32'23/64)
(EFEZ028)	135 (5'5/16)	230 (9'1/6)	477 (18'25/32)	877 (34'17/32)
LIMÓN (ELIM425)	135 (5'5/16)	230 (9'1/6)	477 (18'25/32)	877 (34'17/32)
MEMORY (EMEM325)	135 (5'5/16)	230 (9'1/6)	477 (18'25/32)	877 (34'17/32)
MEMORY MIX (EMIX425)	135 (5'5/16)	230 (9'1/6)	477 (18'25/32)	877 (34'17/32)
LIMÓN / MEMORY / MEMORY MIX (EMEM327)	90 (3'35/64)	175 (6'57/64)	421 (16'37/64)	822 (32'23/64)
SQUARE (ERUB1112, ERUB1115)	90 (3'35/64)	175 (6'57/64)	421 (16'37/64)	822 (32'23/64)
SEN (ESEN0911, ESEN0977)	90 (3'35/64)	175 (6'57/64)	421 (16'37/64)	822 (32'23/64)



Note

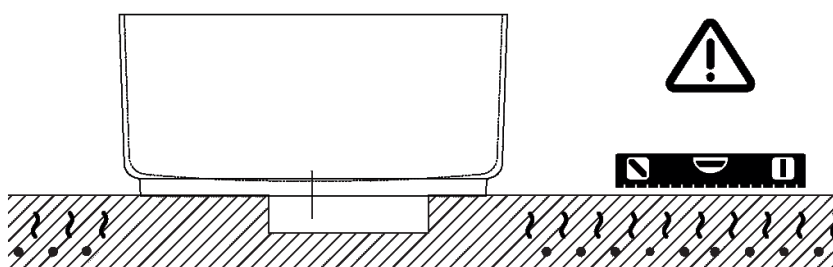

La vasca deve essere installata su un pavimento perfettamente piano.
The bathtub must be positioned on a flat floor surface.

E' necessario predisporre a pavimento un pozzetto.
It is necessary to prepare a recess in the floor.

Evitare di realizzare impianti di riscaldamento nell'area sottostante la vasca.
Avoid the installation of floor heating plants in the area under the bathtub.